


Data sheet

Screw compressor
for bulk trucks

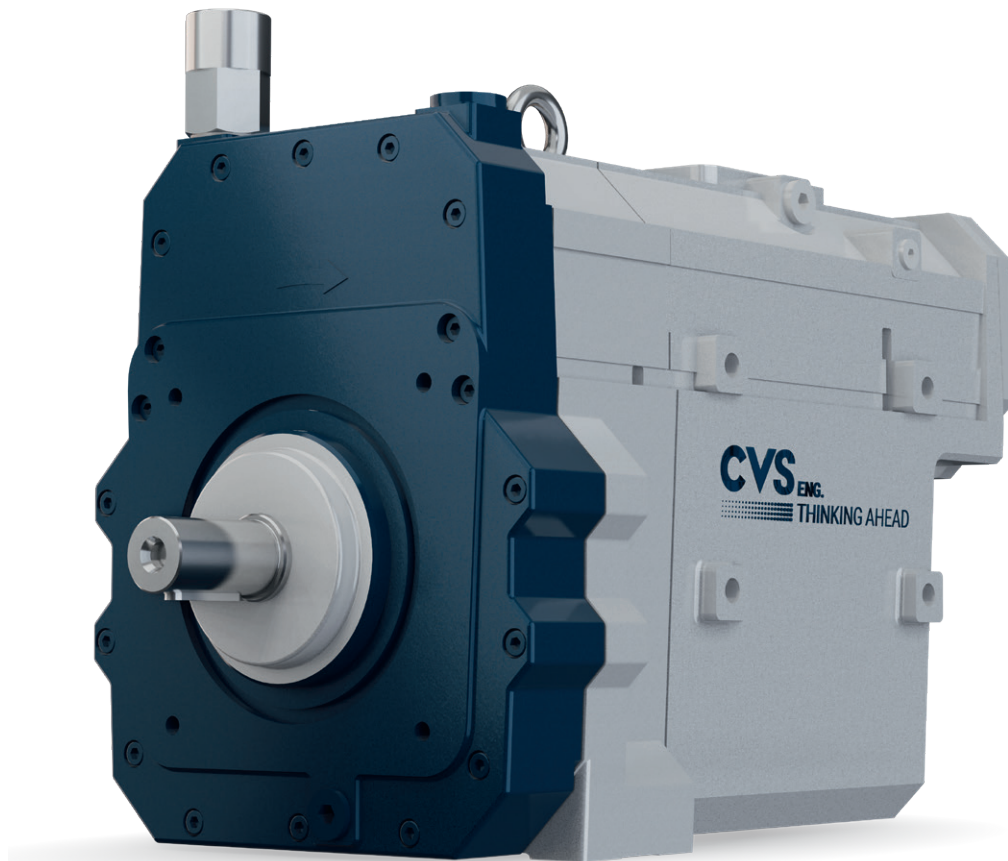

SKL 700 – 1100 LS


Screw compressor,
low speed version

- Overview page 2
- Dimensions page 4
- Features page 3
- Technical data page 4

SKL 700 – 1100 LS

Screw compressor,
low speed version

Overview

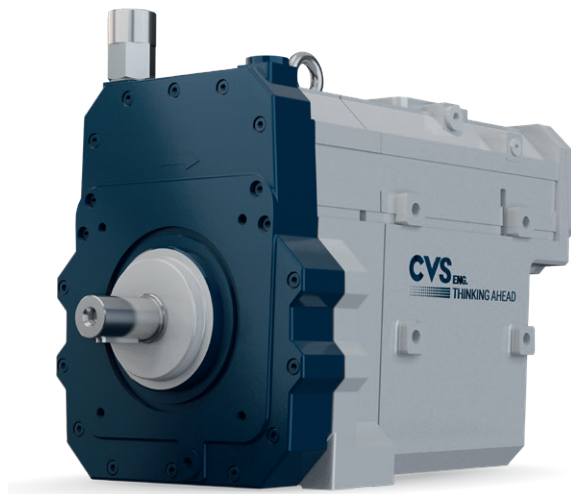

CVS develops and manufactures compressors specifically designed for installation in trucks. The development is made in close collaboration with our customers. This guarantees the optimum product for your application.

The oil free screw compressor

The oil free screw compressor SKL LS was developed especially for the high requirements on mounting in bulk trucks.

Contact person



Roger Homberger

Head of Sales

+49 (0) 7623 71 741-24

+49 (0) 151 72 13 01 81

roger.homberger@cvS-eng.de



Patrick Zettler

Sales

+49 (0) 7623 71 741-23

+49 (0) 162 25 25 694

patrick.zettler@cvS-eng.de



Helen Kreissl

Internal Sales

+49 (0) 7623 71 741-21

helen.kreissl@cvS-eng.de

SKL 700 – 1100 LS

Screw compressor


■ Features

- High quality screw compressors from CVS for reliable discharge
- Unique and robust design guarantee long lasting performance and high operating hours.
- Compact and light-weight design for higher payload on the tanker

Screw compressors with system

The volume flow rate of the SKL LS ranges from 385 up to 1050 m³/h at input drive speeds of 1630 (SKL 1100) resp. 1950 (SKL 700) up to 2930 rpm. The especially developed design of screw ensures increased efficiency and low discharge air temperatures with low noise operation.


Technical subject to alteration

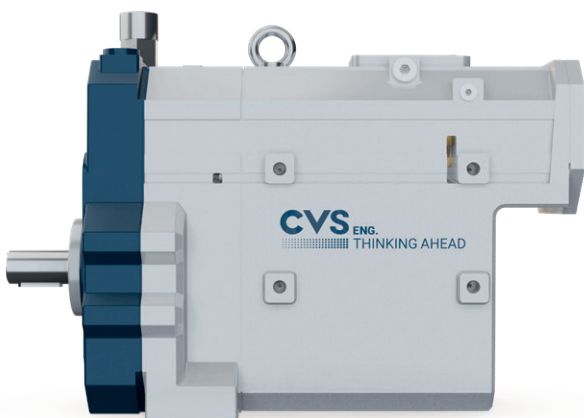

■ Advantages

- Reduced input drive speed
- High quality robust design guarantees long lasting performance and longer operating life
- Low weight
- Extensive speed range allows greater flexibility and maximum performance
- 2.5 bar operating pressure over full speed range
- Compact design for ease of installation
- Integrated lubricating oil pump and easy-to-change oil filter

■ Dimensions

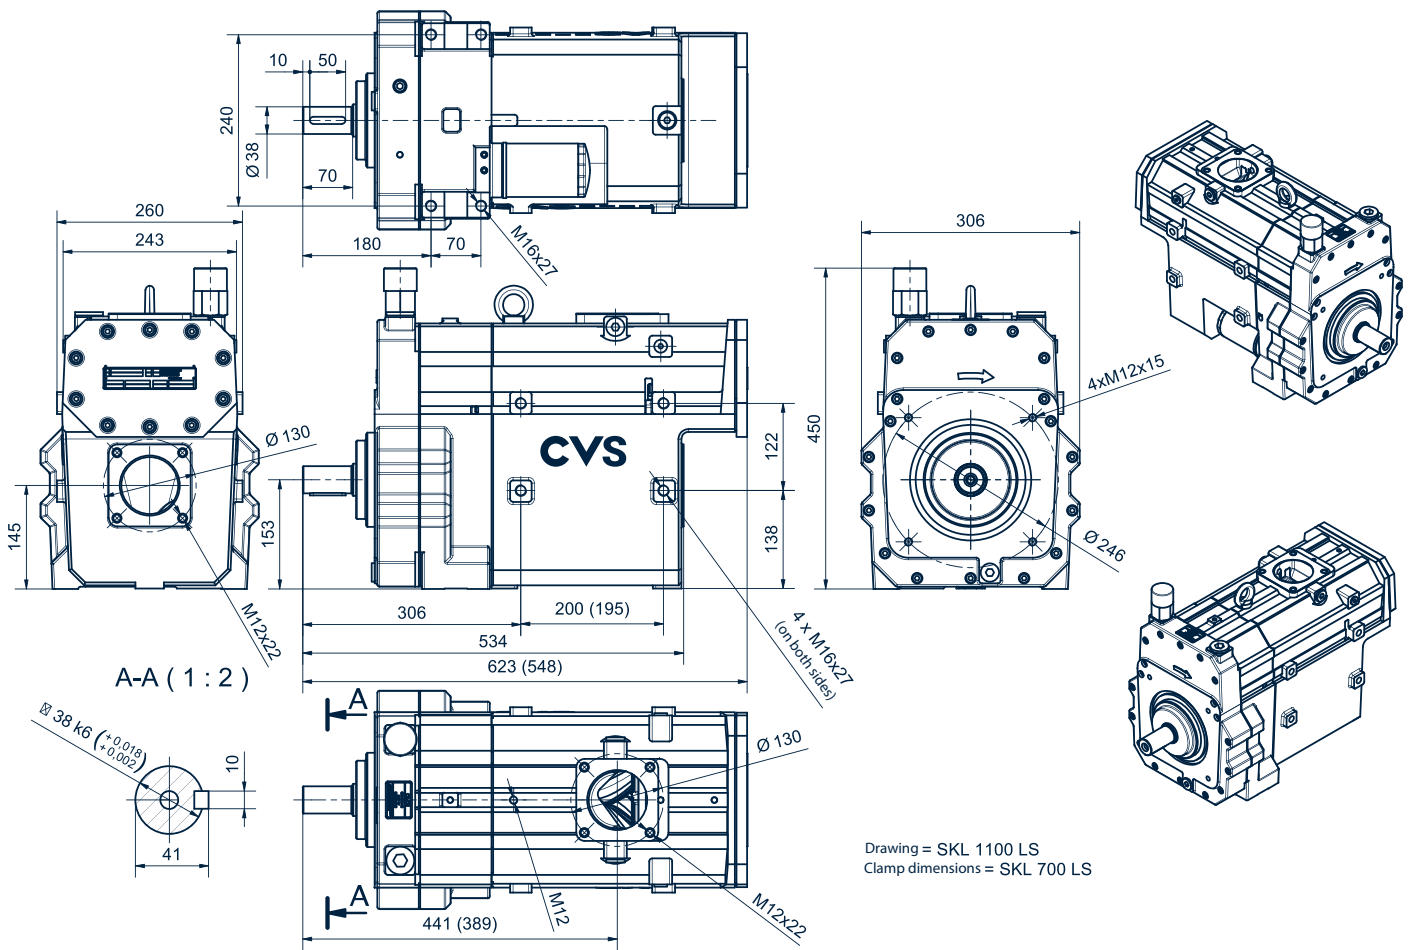

Drawing = SKL 1100 LS
Clamp dimensions = SKL 700 LS

■ Technical data

		SKL 700 LS			SKL 1100 LS		
		rpm	1950	2440	2930	1630	2440
With speed	rpm	1950	2440	2930	1630	2440	2930
Suction volume flow at free air delivery	m ³ /h	420	540	650	550	850	1050
Suction volume flow at 2 bar g	m ³ /h	385	485	600	490	775	980
Max. over pressure	bar g	2.5	2.5	2.5	2.5	2.5	2.5
Speed range	rpm	1950 – 2930			1630 – 2930		
Power requirement at 2 bar g	kW	22.5	28.0	33.5	29.0	43.5	52.5
Weight	kg	126			135		

Technical subject to alteration